



موتور کشاورزی MT4.244


مشخصات فنی:

قطر سیلندر	۱۰۰ میلی متر
کورس پیستون	۱۲۷ میلی متر
تعداد سیلندر	چهار سیلندر
ظرفیت حجمی	۲۹۹ لیتر (۴ اینچ مکعب)
حداکثر توان	۸۲ اسب بخار در دور ۲۰۰۰
حداکثر گشتاور	۱۳۰۰ نیوتن متر در دور ۲۶۰
سیستم ورودی هوا	توربوشارژر
سیستم احتراق	پاشرش مستقیم
نسبت تراکم	۱۷/۵:۱
جهت چرخش	در جهت عقربه های ساعت از دید جلو
سیستم خنک کاری	بوسیله آب و مجهز به خنک کن روغن
وزن	۲۶۵ کیلوگرم (۵۸۴ پوند)
طول	۷۸۷ میلی متر (۲۶ اینچ)
عرض	۵۵۰ میلی متر (۲۵/۷۸ اینچ)
ارتفاع	۷۴۸ میلی متر (۲۹/۵ اینچ)
سیستم برقی	۱۲ ولتی
استاندارد آلایندگی	ECER24 Stage-2 اروپا و
تهویه محفظه لنگی	مجهز به سیستم سوپاپ کنترل آلودگی (PCV)
جذب قدرت فرعی	توسط پولی میل لنگ با شیار ۷ شکل اضافی و یا شفت جذب
	قدرت فرعی از طریق چرخدنده های سیستم تایمینگ

موتور سبز Stage-2

موتورسازان

۸۲ اسب بخار - ۶۱ کیلووات

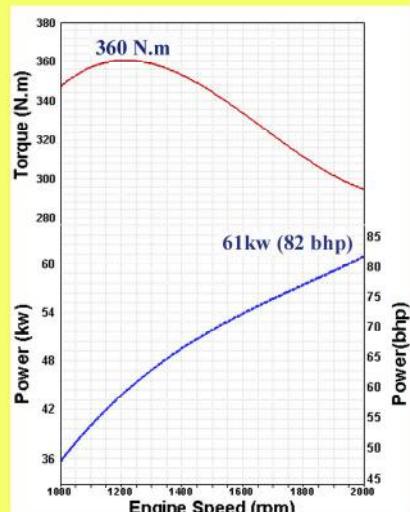




**Manufacturer of 3, 4 & 6 cyl. diesel engines for
agricultural, construction & vehicle applications**

Stage-2 Green Engine

MOTORSAZAN

82 bhp / 61 KW

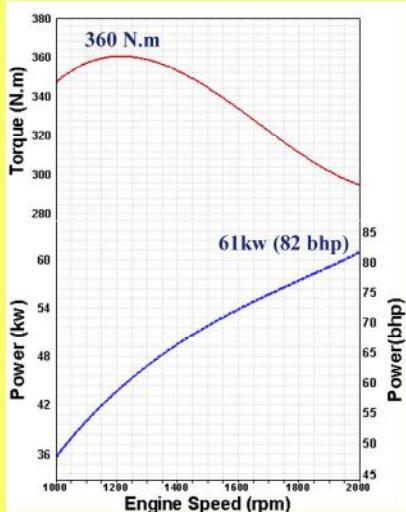

MT4.244 Agricultural Engine General Data

Bore	100 mm
Stroke	127 mm
No. of cylinders	4 - in line, Vertical
Cubic Capacity	3.99 liters (244 in ³)
Max. power	82 bhp @ 2000 rpm
Max. torque	360 N.m @ 1300 rpm
Combustion system	Direct injection
Induction system	Turbocharged
Compression ratio	17.5:1
Rotation	Clockwise, viewed from front
Cooling	Water cooled with oil cooler
Weight	265 kg (584 lb)
Length	678.7 mm (26.7 in)
Width	655 mm (25.78 in)
Height	748.5 mm (29.5 in)
Electrical	12 volt system
Emission Standard	ECE-R96 Stage 2 & ECE-R24
Crankcase ventilation	Equipped with PCV
Power take-off	Gear driven P.T.O from timing case, Optional vee-belt adaptor pulley.



Motorsazan company is certified by TÜV NORD for conformity with ISO/TS/16949, ISO 9001, ISO18001, ISO 14001 standards

Factory:
P.O.Box 51845-337
TABRIZ - IRAN
Tel. +98(411) 4248000
Tel. (Sale Dept.): +98(411) 4245976
Tel. (Pub. Relations): +98(411)4245990
Fax: +98(411) 4245945-6
E-Mail: mail@motorsazan.ir